


Spotlight

LED-Dusk

Einbau

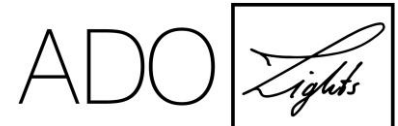

by TTC Timmler Technology GmbH
Christian-Schäfer-Str. 8 | 53881 Flamersheim
T +49 2255 921-200 | F +49 2255 921-500
info@ado-lights.de | www.ado-lights.de

Dimensions	Leuchtgehäuse: \varnothing 52 x 89 mm Ausschnitt \varnothing 70 mm
Power consumption	9.5 W, 18.5 W, 26 W, 30 W, 38.5 W
Luminous flux	max. 4450 lm
Light beam angle	15°/30°/45°/60°
Service life	LED 50,000 hours at 70% of mean luminous flux
Colour temperature	White 3.000 or 4.000 Kelvin
CRI	CRI > 80
Control interface	With ballast, not dimmable
IP rating	IP20
Luminaire housing	Aluminium white, black or grey powder-coated

Converter	Overload protection Overtemperature protection Short-circuit protection
------------------	---

Optional	Phase-cut Optional CRI>90 Glass cover clear Glass cover frosted Honeycomb grid
-----------------	--

Lichtberechnung	EULUM-Datei siehe www.ado-lights.de
------------------------	---

