LED-TRACKLIGHTS

Spotlight for 3-phase track
LED-Dot

Technical data | Technical drawing

Dimensions [Ø x H]	Luminaire unit: 56 x 160 mm
Mounting	Standard: One-track adapter Optional: Track adapter for LED-Stream
Luminaire housing	Plasma-chemically anodised with black or white ceramic haptics
Luminaire cover	PMMA lens
Power rating	24 W
Luminous flux	2000 lm
Beam angle	18°/24°/36°/60°
Colour temperature	White | 2700/3000/4000 Kelvin
Colour rendering index	CRI > 97
Service life	LED > 50 000 hours at 80 % of the output luminous flux [L80/F10]
Control interface	DALI | Casambi/BT | On/Off
Norm/Performance/ Certificates	CE | RoHS
Protection class	IP20
Weight	1.0 kg
Accessories	––
Converter	Integrated Overload protection Overtemperature protection Short-circuit proof
Optional	––
Customised design	––
Light calculation	EULUM file see www.ado-lights.com

Quick info

IP20 DALI RoHS CE

ado-lights.com/tracklights

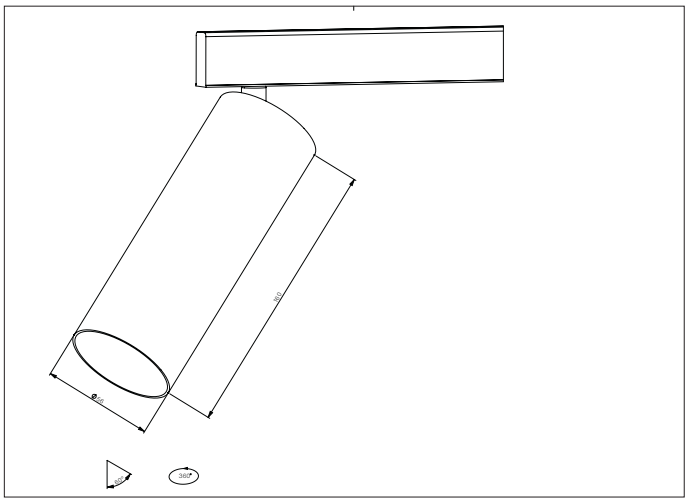

Subject to technical changes · Issued 11/2024 · Photos: TTC archive